

Network Switches

FEATURES

Port Features

Auto negotiation and auto MDI/MDIX

Switching Features

Store and forward switching method


Full duplex flow control and half duplex backpressure

Mac address auto learning and auto aging

LED indicators for monitoring power, link/activity, speed

Management

Unmanaged (Plug and Play)



Support IEEE802.3af/3at (30W each port)




Auto-Negotiation



Auto detect MDI/MDIX




Half-duplex & Full-duplex Mode



150m Transmission distance




Fast Ethernet Switch (10/100Mbps)



PAP Switch (Plug and Play)

SW-UNM-5FE-4POE

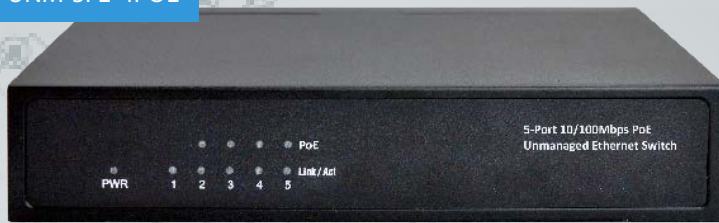

SW-UNM-8FE1GE-8POE



SW-UNM-8FE1GSFP-8POE



TECHNICAL SPECIFICATION

Model No.	SW-UNM-5FE-4POE	SW-UNM-8FE1GC-8POE	SW-UNM-8FE1GSFP-8POE
Product description	4 Fast Ethernet Ports PoE + 1 Fast Ethernet Port	8 Fast Ethernet Ports PoE + Giga Combo	8 Fast Ethernet Ports PoE + 1 Port Giga SFP
Chipset	IP175G + PD69104B	IP1826D + IP108A + IP1001 + PD69008	IP1826D + IP108A + PD69008
10/100Mbps RJ45 Ports	5	8	8
10/100/1000Mbps RJ45 Ports	NA	1	NA
1000Mbps SFP Ports	NA	NA	1
Console Port	NA	NA	NA
PoE Ports	4	8	8
Standards	IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3az, IEEE802.3at, IEEE802.3af	IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3ab, IEEE802.3az, IEEE802.3af, IEEE802.3at,	IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3ab, IEEE802.3z, IEEE802.3az, IEEE802.3af, IEEE802.3at,
Switching Fabric Capacity	1Gbps	3.6Gbps	3.6Gbps
Mac Address Table	2K	8K	8K
Buffer	96Kbps	2.75Mbps	2.75Mbps
Jumbo Frame	1.536KByte	1.536KByte	1.536KByte
IEEE802.3af	✓	✓	✓
IEEE802.3at	✓	✓	✓
Power Supply	DC 51V (65W)	AC 100V-240V 50/60HZ (130W)	AC 100V-240V 50/60HZ (130W)
Max PoE Output Power	62.5W	125W	125W
Housing	Metal	Metal Rack Mount	Metal Rack Mount