


Single Jacket 23AWG Category 6 SFTP CCA Cable - Fluke Test passed

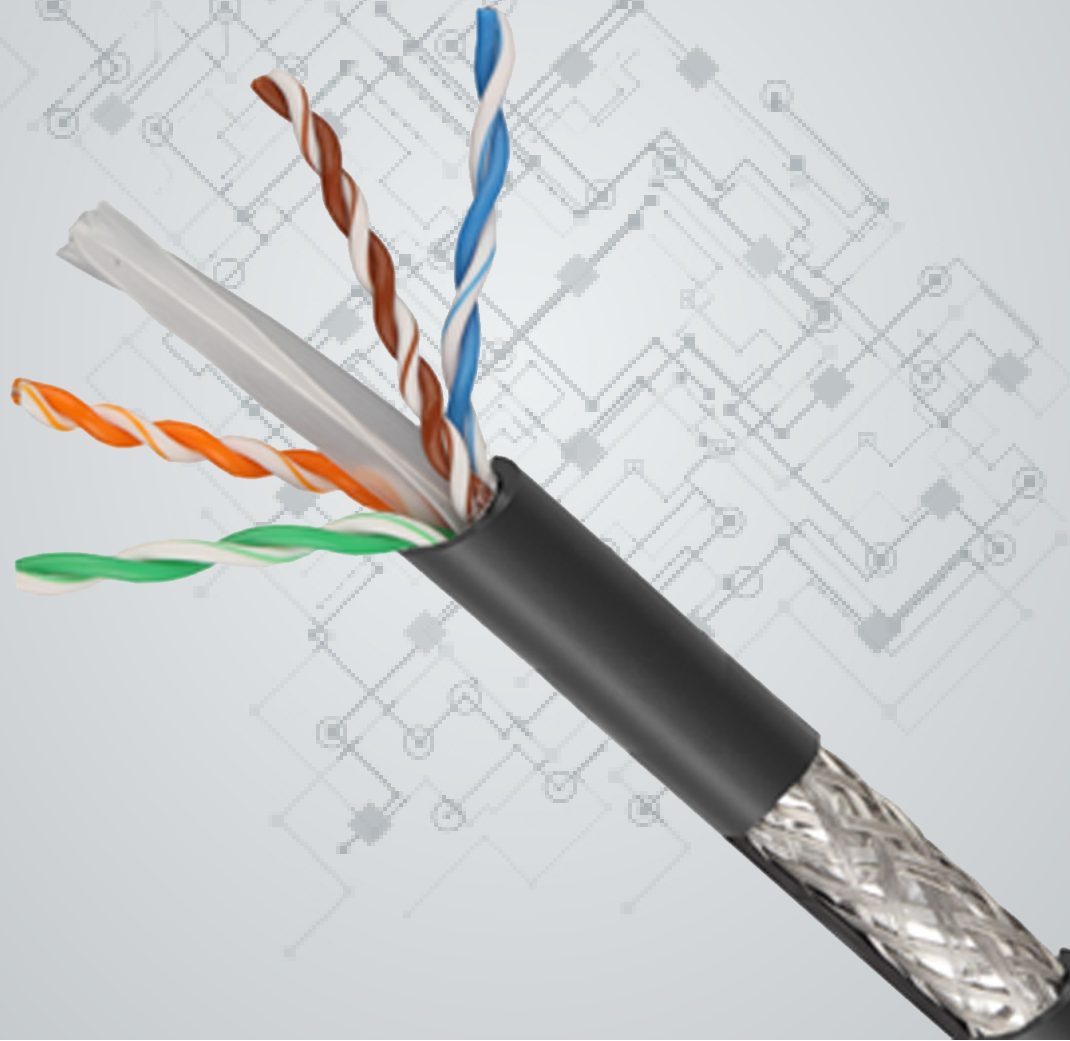

FEATURES

Copper Clad Aluminum LAN cable
 23 AWG
 4 pairs over PE Cross
 Fluke-test passed
 outdoor use

APPLICATION

Integrated wiring system
 Support data, voice, video signal
 Support 10Base-T, 100Base-TX, 1000Base-TX
 100Base-VG-ANY LAN, 155Mbps ATM, 622Mbps ATM, 1000Base-T

TECHNICAL SPECIFICATION

MODEL	CU-CBS/6063-305
Conductor	0.56mm, 35% CCA
Insulation	0.26mm HDPE
No. of Pairs	4 pairs
Color Cord	White-Blue
	White-Orange
	White-Green
	White-Brown
PE Cross / Separator	4.4 x 4.4mm HDPE
Shielding	Spiral wrap Aluminum Mylar
Braiding	Aluminum Magnesium Alloy
Rip cord	Nylon
Outer Jacket	6.7mm LDPE
Packaging	305m reel/box

ELECTRICAL SPECIFICATION

Conductor Resistance	93.8Ω/km Maximum @ 20° C
Insulation Resistance	5,000MΩ/km Minimum @ 20°C
Temperature range	-20°C to 60°C
Spark test	1,000V DC / 1 min; No Breakdown
Volatage rating	30V
Velocity of Propagation	69%