

Network Switches

FEATURES

Port Features

Auto negotiation and auto MDI/MDIX

Switching Features

Store and forward switching method

Full duplex flow control and half duplex backpressure

Mac address auto learning and auto aging

LED indicators for monitoring power, link/activity, speed

Supports IEEE802.1Q VLAN, 4K VLAN Table

Support QoS, Port Mirroring, Link Aggregation Protocol

Management

Web-Based Management Supports

Support SNMP/RMON/TELENET

Console Port



Auto-Negotiation



Auto detect MDI/MDIX



Half-duplex & Full-duplex Mode



150m Transmission distance



Fast Ethernet Switch (10/100Mbps)



2SFP Slots



Web Management




Qos (Quality over service)



Port Isolation



Bandwidth Control

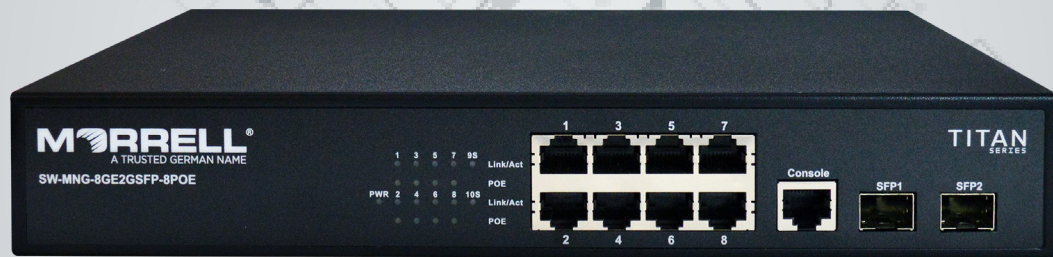

TECHNICAL SPECIFICATION

Model No.	SW-MNG-8GE2GSFP
Product description	8 Ports 10/100/1000Mbps + 2 port 1000Mbps SFP Ethernet Managed Switch
Chipset	RTL8332L + RTL8208L+ RTL8212B
10/100Mbps RJ45 Ports	8
10/100/1000Mbps RJ45 Ports	NA
1000Mbps SFP Ports	2
Console Port	1
PoE Ports	NA
Standards	IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3ab, IEEE802.3z, IEEE802.3ad, IEEE802.3az, IEEE802.1q, IEEE802.1p, IEEE802.1s, IEEE802.1d, IEEE802.1w, IEEE802.1x, IEEE802.1ad
Switching Fabric Capacity	20Gbps
Mac Address Table	8K
Buffer	4.1Mbps
Jumbo Frame	10KByte
IEEE802.3af	NA
IEEE802.3at	NA
Power Supply	AC 100V-240V 50/60HZ
Max PoE Output Power	NA
Housing	Metal Rack Mount
Dimension	280 x 179 x 44.5 mm